arXiv:cond-mat/0510605v1 [cond-mat.other] 22 Oct 2005

Shearing a fermionic gas and quantized friction

Er'el Granot*
Department of Electrical and Electronics Engineering, College of Judea and Samaria, Ariel 44837, Israel

The frictional forces in sheared fermionic gas are investigated. The gas is sheared by two sliding surfaces. Except for a small imperfection (bulge) on one of them, the surfaces are totally smooth. We show that when the bulge is extremely small, and the gas is also confined in the lateral dimension, the frictional force (F) is *quantized*. That is, $F = m\mu_F v$, where v is the sliding velocity with respect to the lubricant gas, m is an integer, and μ_F is the friction coefficient. It is also shown that μ_F is proportional to the Planck constant h and depends only on the bulge's properties (it does not depend on either the gas properties or the sliding velocity).

PACS: 68.35.Af, 72.10.Fk, 71.55.A and 72.20.Dp

I. INTRODUCTION

Recent developments in micro-electromechanical systems have raised practical interest in research involving quantum friction [1–11]. However, the investigation of quantum friction has revealed some surprising fundamental effects. For example, two smooth dielectric surfaces moving laterally (parallel to one another) experience frictional forces as if the vacuum between them were a viscous fluid [12–14]. Therefore, friction measurements can contain a great deal of information on the nature of vacuum fluctuations. Sliding surfaces, however, are seldom smooth; in fact, they are usually rough and corrugated. The most common remedy for such roughness is, of course, lubrication, and in modern micro-machinery, the lubricants are usually gases [15,16]. The possibility of confining a fermionic gas in space with a laser beam has been shown experimentally (see, for example, refs. [17,18]).

In this paper, we investigate the onset of frictional forces between two adjacent surfaces. The two surfaces are sliding against one another at zero temperature, whilst the shearing is lubricated by a fermion (say, atoms or electrons) gas. On one of the surfaces there is a small bulge. The collisions between the particles and the bulge create the frictional force. The main argument of (and motivation for) this paper is the following: a small fraction from each of the transversal modes is reflected from the bulge. The modes, which are propagating against the bulge, are reflected from it with a slightly higher energy. When the sliding velocity is low (in comparison to the Fermi velocity), the energy increase is proportional to the particles' momentum, and therefore, the power activated upon the bulge is proportional to $p^2 R$ (p is the momentum and R is the modes' reflectivity coefficient– see a detailed discussion further on). Now, since for a very weak protrusion $R \sim p^{-2}$, one can conjecture that each mode makes *exactly* the same contribution to the frictional force, which therefore should be quantized. In this paper, we show that for a very weak protrusion (the bulge), this is indeed the case.

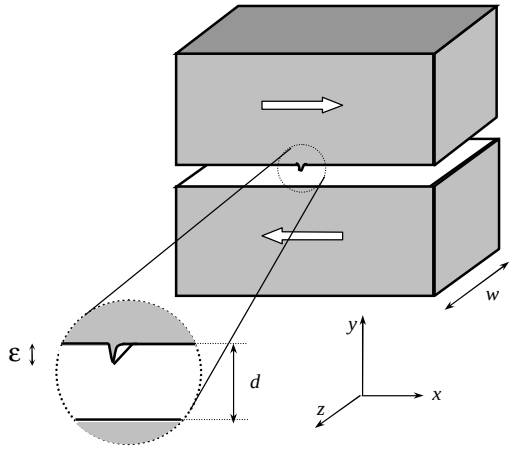

FIG. 1. *An illustration of the two sliding surfaces. On the upper surface there is a small bulge, which is magnified in the inset. The fermionic gas is confined between the two surfaces.*

II. THE SYSTEM'S DESCRIPTION

Imagine a lubricating fermionic gas confined between two infinitely long surfaces at zero temperature (they are infinitely long in the x-direction and have a finite width in the z direction, see Fig.1). The fermionic gas is thus confined to a rectangular cross section, whose width corresponds to the surfaces' width (w) and whose height is equal to the distance between them (d in the y-direction). In the following, we discuss only very close surfaces, i.e., $d \ll w$. On one of the surfaces, say the upper one, there is a small protrusion (bulge or bump, for example, see Fig.1). For simplicity, it is assumed that the protrusion has no features in the transverse direction, i.e., it is independent of z, and thus can be fully characterized by its cross section in the x-y plane. When the two surfaces slide against each other, with a relative velocity $2v$ (i.e., each of the surfaces slides with a velocity v with re-

erel@yosh.ac.il

spect to the lubricant gas), the protrusion's resistance to the sliding is manifested by a frictional force. If not for the bulge, the shearing process would not influence the lubricant. Classically, the particles of the lubricant gas, which are bouncing bouncing back and forth in their confinement zone prevent the bulge from sliding smoothly through the lubricant.

The Schrödinger equation, which describes the dynamics of the confined lubricant, reads

$$-\frac{\hbar^2}{2m_0}\nabla^2\psi + \left[V_{su}(y) + V_{co}(z) + V_{pr}(x,y)\right]\psi = i\hbar\frac{\partial\psi}{\partial t} \tag{1}$$

where $V_{su}(y)$ is the potential of the surfaces, $V_{co}(z) \equiv \begin{cases} 0 & 0 \le z \le w \\ \infty & otherwise \end{cases}$ is the confinement potential in the z-direction and $V_{pr}(x,y)$ is the potential of the protrusion, which satisfies $V_{pr} \to \infty$ for $|x| \to \infty$; note that it does not depend on z.

In the following discussion, we assume zero temperature, and a very sparse lubricant (very low density), i.e., the density per unit length (n) satisfies $n \ll d^{-1}$. Therefore, only the first transversal mode (which is related to the coordinate y) is occupied. In the z-direction, however, many modes can survive, which will be identified by their quantum number j. For any given energy $E = \hbar\omega$ and a given channel j, the quantum wave function of the lubricant particles can be written:

$$\psi^{\pm}_{p,\omega} = \sin(\pi y/d)\sin(\pi z p/w)\exp(\pm ik^j x - i\omega t) \tag{2}$$

where the longitudinal wave number k^j satisfies: $0 \le k^j \le k_F^j$, when

$$\left(k_F^j\right)^2 \equiv 2m_0E_F/\hbar^2 - (\pi/d)^2 - (\pi j/w)^2 \tag{3}$$

m_0 is the lubricant gas particles' mass; j is an integer that characterizes the transversal mode, E_F is the Fermi energy and the upper (lower) sign in eq.(2) refers to particles which propagate from the left (right) side of the bulge to its right (left) side.

In order to solve this problem, it is very convenient to choose a frame of reference in which the bulge is at rest. Consequently, the bulge "sees" (in the new frame of reference) on its right, particles emerging with the wave numbers $0 \le k_r \le k_F^j + m_0v/\hbar$, for every channel j, while on its left the incoming particles have, for the same channel, the wave numbers: $0 \le k_l \le k_F^j - m_0v/\hbar$ (see Fig.2).

In the following we discuss only very low sliding velocities, i.e., $mv/\hbar \ll k_F^j$, which means that the particles' maximum energy on the right is higher by $\Delta\varepsilon_j \cong 2k_F^jv\hbar$ (in the moving frame) than the particles' maximum energy on the left.

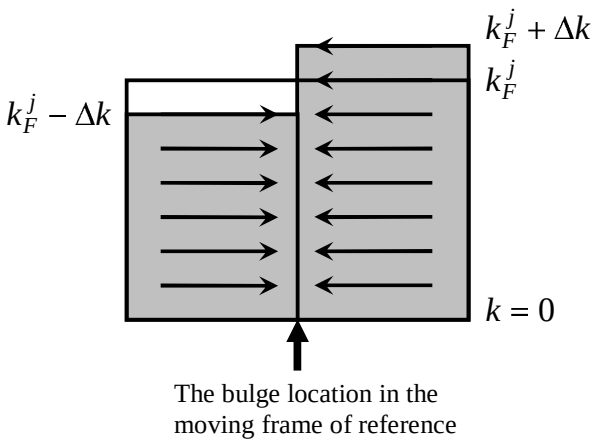

FIG. 2. *At the moving frame (where the bulge is at rest), the particles on both sides of the bulge can be regarded as hitting it with slightly different momenta (for the jth mode in the figure), $\Delta k \equiv m_0v/\hbar$.*

Clearly, in the first approximation, only the particles that propagates from the right (to the left) with momentum $k_F^j - m_0v/\hbar \le k_r \le k_F^j + m_0v/\hbar$ contribute to the energy wasted by friction.

Let us denote by $T_j \equiv T(k = k_F^j)$ the quantum transmission (for transport in the x-direction) through the bulge via the jth channel. It should be pointed out here that it is possible to describe the transmission by a single parameter since the geometry of the bulge cannot allow for transmission from one channel to another. The reflected current of the jth channel (note that here we are regarding a particle's current and not a charge current) from the bulge, which includes only the particles with $k_r \ge k_F^j - mv/\hbar$, is equal to

$$I_j = \Delta\varepsilon_j(1 - T_j)/\hbar \tag{4}$$

.

Each of the reflected particles gains an energy quantum $2\Delta\varepsilon_j$, and therefore the power imposed upon the bulge is

$$P = 2\sum_j \Delta\varepsilon_j^2(1 - T_j)/\hbar \tag{5}$$

.

Therefore, the power produced during the shearing process maintains the relation

$$P = \frac{4}{\pi}v^2\hbar\sum_j (k_F^j)^2(1 - T_j) \tag{6}$$

.

Finally, the friction force reads

$$F = dP/dv = \mu_F v \tag{7}$$

.

where the friction coefficient is

$$\mu_F \equiv h \sum_j n_j^2 (1 - T_j) \tag{8}$$

and $n_j \equiv (2/\pi) k_F^j$ is the particles' density per unit length of the jth channel (the prefix 2 comes from the spin degeneracy).

Eq. 7 suggests a linear relationship between the frictional force and the shearing velocity. Notice that T_j is also a function of the lubricant density, since it is a function of the Fermi wave number. On the other hand, the transmission coefficient T has no dependence on the lubricant's characteristics other than its density, but it is highly sensitive to the bulge's properties, and therefore no general relation can be obtained. However, a general conclusion that does arise from Eq. 8 is that

$$\mu_F \leq \mu_F^{max} \equiv h \sum_j n_j^2 \tag{9}$$

regardless of the bulge's characteristics or dimensions. Moreover, this result even holds true for an arbitrary number of protrusions, and thus can be applied to any rough surface. For any number of channels, Eq. 9 can be evaluated as

$$\mu_F^{max} = h \left[\left(q^2 - \frac{4}{d^2} \right) m - \frac{2}{w^2} \frac{m(m+1)(2m+1)}{3} \right] \tag{10}$$

where $q^2 \equiv (2m_0 E_F/\hbar^2)(4/\pi^2)$ and m, which is the integral part of $w\left(q^2/4 - 1/d^2\right)^{1/2}$, is the channel number (note the difference between the channel number m and the lubricant particle mass m_0). When $m \to \infty$, i.e., $w \to \infty$, it can be approximated by

$$\frac{\mu_F^{max}}{w} = \frac{1}{3} h \left(q^2 - 4/d^2\right)^{3/2} \tag{11}$$

When the onset of friction is being considered the exact nature of the protrusion is very important. Of course, the transmission T cannot have a general expression; however, in a wide range of thin and small bulges (or bumps), the transmission can be expressed by [19]

$$T_j \cong \left(1 + (n_c/n_j)^2\right)^{-1} \tag{12}$$

where n_c is a transition density, which characterizes the bulge. If the problem was a one-dimensional one, and the protrusion was a delta function, then the approximation sign '$\cong$' would be replaced by the equality sign '= '. Nevertheless, if the protrusion is a very small bulge, this expression can be applied with great accuracy, even to problems with more than a single dimension (see refs. [19]).

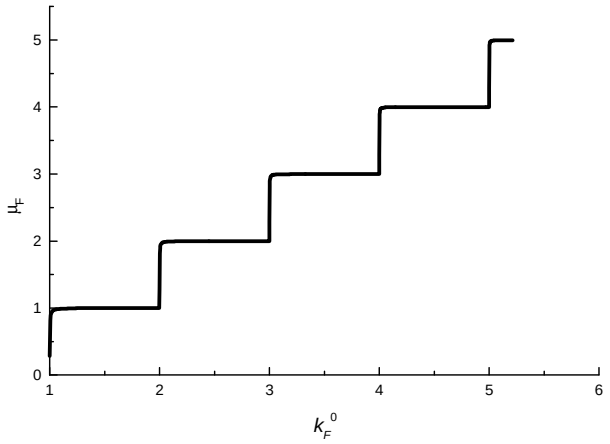

FIG. 3. *A plot of the friction coefficient (μ_F) for the case $n_c = 0.1/w$ as a function of the normalized Fermi wave number ($k_F^0 \equiv \sqrt{2m_0 E/\hbar^2 - \pi^2/d^2}$). μ_F is measured in units of hn_c^2 and k_F^0 is measured in units of π/w. This plot manifests the quantization of the friction coefficient.*

If, for example, the protrusion is a very shallow but long bulge, then $n_c = L^{-1}$, where L is the bulge's length. If the bulge is a point impurity, then $n_c = \nu\varepsilon^2/d^3$, where ε is the distance from the surface and ν is a parameter that depends on the eigen-energy of the impurity, and has a weak dependence on ε (see refs. [19,20]).

In any case, Eq. 8 should read

$$\mu_F = h n_c^2 \sum_j \frac{1}{1 + (n_c/n_j)^2} \tag{13}$$

For very sparse lubricant ($n_j \ll n_c$ for every channel j), the friction coefficient expectedly vanishes and the expression in eq. 9 is regained: $\mu_F = h \sum_j n_j^2$.

More important is the case of a point protrusion, that is $\varepsilon \to 0$, or $n_c \ll n$. This regime is important not only because it investigates *the onset of friction* due to a minuscule defect (bulge), but also because it even applies to relatively high densities (so long as the distance between the surfaces is small enough, i.e., $n_j \ll d^{-1}$ for every j), in which case the interaction between the particles (if there is any) can be neglected.

The friction coefficient (eq. 13) for the case $n_c = 0.1/w$ as a function of the Fermi wave number $k_F^0 \equiv \sqrt{2m_0 E_F/\hbar^2 - \pi^2/d^2}$ (see definition in Eq. 2) is presented in Fig.3. μ_F is measured in units of hn_c^2 and k_F^0 is measured in units of π/w. The plot exhibits a staircase pattern and reveals the *quantization* of the friction coefficient μ_F, where the friction coefficient quantum is hn_c^2. This quantity does not depend on either the lubricant's properties or its density. It depends only on properties of the bulge and the distance between the surfaces.

When $n_c \to 0$, the staircase pattern is more sharply delineated, and Eq. 13 can be written

$$\mu_F = mn_c^2 h \tag{14}$$

where m is the total number of propagating channels. This is the main result of this paper, which manifests the quantization of quantum friction for extremely weak protrusions. Each mode has exactly the same contribution to the friction force:

$$\delta F = n_c^2 h v \tag{15}$$

III. NUMERICAL EVALUATION AND POSSIBLE IMPLEMENTATION

If the bulge is a point protrusion, whose de Broglie wavelength is approximately equal to ε and, for example, $d \sim 1nm$, $\varepsilon_0/d \sim 0.3$ and $v = 1m/sec$, then the friction quanta δF, (i.e., the force is $F = m\delta F$) is around $\delta F > 10^{-13}$N – a small but measurable quantity [4,5].

Note that the friction quantum is independent (in the high-density regime) of the gas properties. Therefore, when the density increases, the force increases with it but not its quanta.

To enlarge δF, one can use more bulges or more parallel channels (see Fig.4). Since the gas is confined only to the laser beam, it is possible to use many parallel beams, each of which makes the same contribution to the force (note that δF is independent of w).

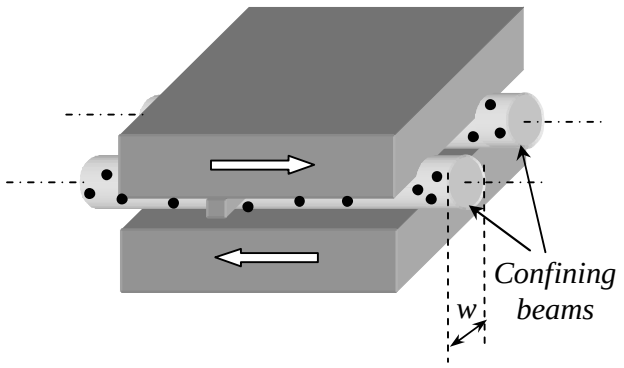

FIG. 4. *The gas is confined by laser beams. Each beam makes the same contribution to the friction force. The black dots represent the confined atoms (fermions).*

IV. SUMMARY

The frictional force which emerges in a lubricant fermionic gas due to shearing was investigated. The discussion focused on the onset of the frictional force. It was shown that when the smoothness of one of the sliding surfaces is damaged by a single small imperfection, the frictional force is proportional to the sliding velocity, i.e., $F = \mu_F v$, where the friction coefficient is quantized $\mu_F = mn_c^2 h$ (m is an integer). The friction coefficient quantum $\delta\mu_F = n_c^2 h$ depends only on the geometry, i.e., on the bulge and on the distance between the surfaces; it does no depend on either the lubricant gas properties or the sliding velocity.

I would like to thank prof. Mark Azbel for enlightening discussions.

[1] G. Rubio, N. Agrait, and S. Vieira, Phys. Rev. Lett. **76**, 2302 (1996)
[2] M. Kardar and R. Golestanian, Rev. Mod. Phys. **71**, 1233 (1999)
[3] G.J. Maclay, H. Fearn and P.W. Milonni, Eur. J. Phys. **22**, 463 (2001)
[4] F. Chen, U. Mohideen, G.L. Klimchitskaya and V.M. Mostepanenko, Phys. Rev. Lett. **88**, 101801 (2002)
[5] F. Chen, U. Mohideen, G.L. Klimchitskaya and V.M. Mostepanenko, Phys. Rev. A **66**, 032113 (2002)
[6] F.M. Serry, D. Wallisner, and G.J. Maclay, J. Microelectromech. Syst. **4**, 193 (1995)
[7] H.B. Chan, V.A. Aksyuk, R.N. Kleiman, D.J. Bishop and F. Capasso, Science. **291**, 1941 (2001)
[8] S.Granick, Phys. Today, **52**, 27 (1999)
[9] D. Fuhrmann and Ch. Wöll, New J. Phys. **1** 1.1, (1998)
[10] R. Burns, J.E. Houston, R.W. Carpick and T.A. Michalske, Phys. Rev. Lett. **82**, 1181 (1999)
[11] A. Liebsch, Phys. Rev. B **55**, 13263 (1997)
[12] J.B. Pendry, J. Mod. Opt. **45**, 2389 (1998)
[13] J.B. Pendry, J. Phys. Conden. Matt. **9**, 10301 (1997)
[14] A.I. Volokitin and B.N.J. Persson, J. Phys.:Condens. Matt **11** 345 (1999)
[15] W.-L.Li, C. Lee, C.-W. Chen, F.-R. Tsai, M.-D. Chen, W.-T. Chien, Microsystem Tehnologies **11**, 23 (2005)
[16] M.-D. Chen, J-W. Lin, S.-C. Lee, K.-M. Chang, and W.-L. Li, Tribology International **37**, 507 (2004)
[17] K.M. O'Hara, S.R. Granade, M.E. Gehm, T.A. Savard, S. Bali, C. Freed, and J.E. Thomas, Phys. Rev. Lett. **82**, 4204 (1999)
[18] V. Zaloj, M. Urbakh, and J. Klafter, Phys. Rev. Lett. **82**, 4823 (1999)
[19] E. Granot, Phys. Rev. B **60**, 10664 (1999); 14172 (1999)
[20] E. Granot, Phys. Rev. B **71**, 035407 (2005); Europhys. Lett. **68**, 860 (2004)